

LAUNTOP®

LIGHT UP YOUR LIFE



LAUNTOP®

FUJIAN EVERSTRONG LEGA POWER EQUIPMENTS CO., LTD

Add: Hongkuan Industrial Park, Fuqing City, Fujian Province, China

www.launtop.com | www.launtop.cn | www.launtop-power.com

2018 / 2019 PRODUCTS CATALOGUE

GENERATOR / ENGINE / PUMP / WELDING GENERATOR / TILLERS

LAUNTOP®

LAUNTOP is established in Gaishan industry zone, Fuzhou in 2000. We moved to Hongkuan industry zone, Fuqing in 2006. Nowadays, we have become specialized in the production of internal combustion engines, generator sets (1kW to 2500kW) and garden machinery.

SUFFICIENT PRODUCTION CAPACITY

Our factory area covers a land of 200,000 square meters. Our professional team is more than 900 employees. So, our production capacity is 400,000 air-cooled products and 5,000 water-cooled diesel generators, our annual sales is over \$110 million in 2017. 90% of annual sales are from overseas.

GOOD PRPUTATION IN THE MARKET

Our products have been supplied to 120 countries in the world. With full international certificates, like CE, GS, EPA, ETL, Lega products have won a good reputation from customers in Europe, the US, Southeast Asia and the Middle East.

STRONG MANAGEMET TEAM FOR R&D

Our company owns Fujian Province Enterprise Technology Center and the technology center laboratory with domestic well-known universities. We have applied for 20 plus independent invention patents, 50 plus utility model patents and 80 plus product design patents. Every year, we put 5% of annual output value into product development and technological renovation, and spend almost \$2 million on R&D projects.

LAUNTOP PROFILE



MORE THAN 900 EMPLOYEES



USD 110 MILLION PLUS IN 2017



PRODUCTION CAPACITY: 400,000 UNITS OF GENERATORS EACH YEAR.



PRODUCTS ARE SOLD TO OVER 120 COUNTRIES

LAUNTOP POWER WORKSHOP OVERVIEW



PRODUCTION CENTERS

LAUNTOP has ability of research, development , manufacture and assemble generator sets, We now have sheet metal production workshop, assembly workshop and test room, and there is chassis line, canopy line and CNC center in sheetmetal workshop. Assembly workshop got assembly line, installation line and electronic control line. Test room got test center, clean & package line.

Annual Production Capacity:

400,000 Units of Products



HISTORY

2000



Company formally established.

2008



Moved to new factory (Hong kuan Industrial Park), started to produced industrial diesel generators.

2003



Fuzhou Launtop M&E Co., Ltd. Set up the gasoline generator set production line.

2015



Build the lawn mower production line.

2016



Sales Center was moved to "IFC in Fuzhou international financial centre".

Set up department doing LED lightings , Solar products, new energy products.

2017



Start to do the preliminary work for IPO. Established a new subsidiary --Lega Power HK Limited.

AUTHORISED LAUNTOP DEALERS

120+ National Dealer Network – providing the best advice and after sales service that is only available through specialist service dealers.

PRODUCTS FEATURE

- 

Lightweight Portable
The alternator is connected directly to the engine, eliminating the weight of the flywheel.
- 

Unique Structure Utilizing The Latest Technology
The generator is cooled by a patented air intake system. The smart throttle power management system, the sound attenuated structure and inverter style output all combine to produce state of the art portable electric power.
- 

Certification
LAUNTOP digital gensets have received EPA, CE, CARB, CETL and PSE certification.
- 

Green Power System
The LAUNTOP Digital Sinemaster Series is among the most environmental friendly class of generators in the marketplace.
- 

Quality Power
LAUNTOP applies inverter technology to the Digital Sinemaster Series generators to produce pure sine wave AC output.
- 

A Wide Range of Benefits
In addition to clean, quiet, and efficient power, LAUNTOP offers superior overload and low oil level protection to all digital generators.



Diesel Engine	Page 09-10
Twin-Cylinder Engine	Page 11-12
Diesel Generator	Page 13-16
Silent Diesel Generator	Page 17-20
Twin-Cylinder Diesel Generator	Page 21-22
Diesel Water Pump	Page 23-24
Diesel High Pressure Pump	Page 25-26
Diesel Iron Pump	Page 27-28

Gasoline Engine	Page 31-32
Twin-Cylinder Engine	Page 33-34
Gasoline Generator	Page 35-40
Silent Gasoline Generator	Page 41-42
Twin-Cylinder Gasoline generator	Page 43-44
Liquified Petroleum Gas & LPT Generator	Page 45-46
Portable Gasoline Generator	Page 47-48
Gasoline Water Pump	Page 49-50
Gasoline High Pressure Pump	Page 51-52
Gasoline Iron Pump	Page 53-54
Gasoline Trash Pump	Page 55-56

Inverter Generator	Page 57-58
--------------------------	------------

Diesel Welding Generator	Page 59-62
Gasoline Welding Generator	Page 63-64

Tillers	Page 67-68
---------------	------------

Diesel Products

Gasoline Products

Inverter Generator

Welding Generator

Tillers

LAUNTOP

DIESEL ENGINE

Output :3.8hp-10hp



DIESEL ENGINE

-  Air Cooled Engine
-  IP 23 Protection
-  Diesel Engine
-  Noise Compliant

- Feature:**
- Proven Launtop Technology.
 - Proven economy and reliability.
 - Compact and lightweight.
 - Fast and easy all weather starting.
 - Automatic low oil level cut out.
 - Heavy duty air cleaners.
 - Lower fuel consumption compared to LA engines.



SPECIFICATION

Model	LA170F	LA178F	LA186F	LA188F	LA192F
Borexstroke(mm)	70×55	78×62	86×70	88X78	92X75
Displacement(cc)	211	296	406	474	499
Engine speed(rpm)	3000/3600	3000/3600	3000/3600	3000/3600	3000/3600
Rated output(hp)	3.4/3.8	5/5.4	7.7/8.6	9.0/9.8	9.4/10.3
Max.output(hp)	3.8/4.2	5.5/6	8.5/9.5	10.0/10.9	10.3/11.4
Lube oil capacity(L)	0.75	1.1	1.65	1.65	1.65
Fuel tank capacity(L)	2.5	3.5	5.5	5.5	5.5
Fuel consumption(g/kW.h)	≤290	≤290	≤280	≤280	≤280
Dimension(L×W×H)(mm)	332×392×416	383×421×450	417×441×494	417×441×500	417×441×501
Net weight(recoil) (kg)	26	32	44	45	47

SPECIFICATION

Model	LA170FA	LA178FA	LA186FA	LA170FS	LA178FS	LA186FS
Borexstroke(mm)	70×57	78×64	86×72	70×55	78×62	86×70
Displacement(cc)	219	306	418	211	296	406
Engine speed(rpm)	3000/3600	3000/3600	3000/3600	1500/1800	1500/1800	1500/1800
Rated output(hp)	3.4/3.8	5/5.4	7.7/8.6	3.4/3.8	5/5.4	7.7/8.6
Max.output(hp)	3.8/4.2	5.5/6	8.5/9.5	3.8/4.2	5.5/6	8.5/9.5
Lube oil capacity(L)	0.75	1.1	1.65	0.75	1.1	1.65
Fuel tank capacity(L)	2.5	3.5	5.5	2.5	3.5	5.5
Fuel consumption(g/kW.h)	≤290	≤290	≤280	≤290	≤290	≤280
Dimension(L×W×H)(mm)	332×392×416	383×421×450	417×441×494	332×392×416	383×421×450	417×441×494
Net weight(recoil) (kg)	26	32	44	26	32	44

LAUNTOP

TWIN-CYLINDER DIESEL ENGINE

Output :18.7hp



TWIN-CYLINDER DIESEL ENGINE


-  Air Cooled Engine
-  IP 23 Protection
-  Diesel Engine
-  Noise Compliant

- Feature:**
- Proven Launtop Technology
 - Proven economy and reliability
 - Compact and lightweight
 - Fast and easy all weather starting
 - Automatic low oil level cut out
 - Heavy duty air cleaners
 - Lower fuel consumption compared to LA engines



SPECIFICATION

Model	LA290
Bore×stroke(mm)	90×75
Displacement(cc)	954
Engine speed(rpm)	3000/3600
Rated AC output(hp)	17
Max. AC output(hp)	18.7
Lube oil capacity(L)	3
Fuel tank capacity(L)	7
Fuel consumption(g/kW.h)	≤280
Dimension(L×W×H)(mm)	580×475×535
Net weight(recoil) (kg)	81

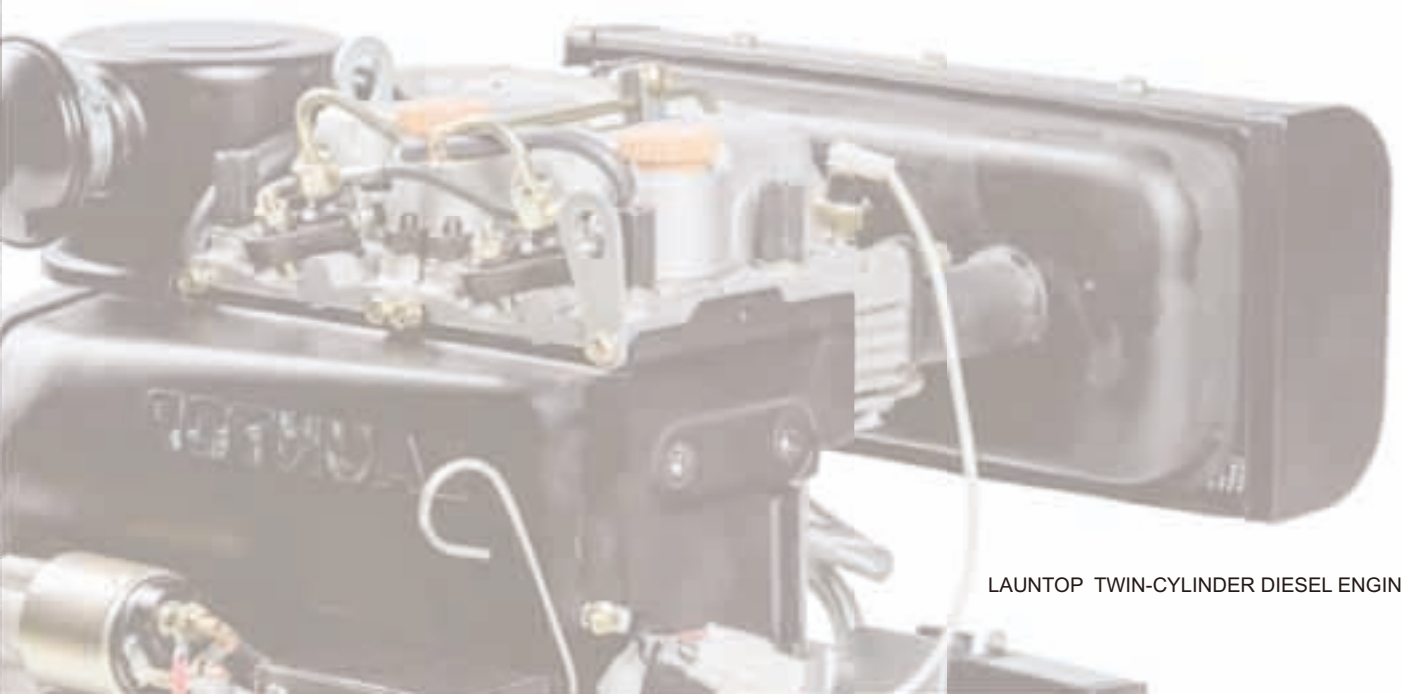

LAUNTOP

DIESEL GENERATORS

Output :1.7kW-5.0kW



DIESEL GENERATOR

- Air Cooled Engine
- IP 23 Protection
- Diesel Engine
- Noise Compliant

- Feature:**
- AVR gives stable voltage and safe work.
 - Circuit breaker protects overload operation.
 - 12.5L tank ensures 8 hours' continuous running.
 - Low oil shutdown stops engine in emergency.
 - Various sockets for different market.



SPECIFICATION

DIESEL GENERATOR			
Model	LDG2200CL(E)	LDG3600CL(E)	LDG5000CL (E) LDG5000L (E) LDG5000K (E)
Voltage (V)	110-240	110-240	110-240
Frequency (Hz)	50/60	50/60	50/60
Rate. AC output (kW)	1.7/2.0	2.7/3.0	4.2/4.6
Max. AC output (kW)	1.9/2.2	3.0/3.3	4.6/5.0
Power Factor cosΦ	1.0	1.0	1.0
DC output (V/A)	12/6	12/6	12/6
Engine model	LA170F	LA178F	LA186F
Starting system	Recoil/Electric	Recoil/Electric	Recoil/Electric
Lube oil capacity (L)	0.75	1.1	1.65
Fuel tank capacity (L)	12.5	12.5	12.5
Fuel consumption (g/kW h)	≤430	≤420	≤400
Noise (7 meters away) dB (A)	≤79	≤80	≤82
Dimension (L×W×H) (mm)	610×450×500	680×455×545	LDG5000CL(E):740×475×590 LDG5000L(E):800×520×600 LDG5000K(E):750×485×605
Net weight (recoil) (kg)	60(70)	70(80)	LDG5000CL (E):81(93) LDG5000L (E):98(110) LDG5000K (E):89(101)



LAUNTOP

DIESEL GENERATORS

Output :4.5kW-7.0kW

DIESEL GENERATOR

-  Air Cooled Engine
-  IP 23 Protection
-  Diesel Engine
-  Noise Compliant

Feature:

- AVR gives stable voltage and safe work.
- Circuit breaker protects overload operation.
- 12.5L tank ensures 8 hours' continuous running.
- Low oil shutdown stops engine in emergency.
- Various sockets for different market.



SPECIFICATION

DIESEL GENERATOR				
Model	LDG6000CL(E) LDG6000L(E) LDG6000K(E)	LDG6500CL(E) LDG6500L(E) LDG6500K(E)	LDG7500CL(E) LDG7500L(E) LDG7500K(E)	LDG8000CL(E)
Voltage (V)	110-240	110-240	110-240	110-240
Frequency (Hz)	50/60	50/60	50/60	50/60
Rate. AC output (kW)	4.5/5.0	5.0/5.3	5.5/6.0	6.0/6.5
Max. AC output (kW)	5.0/5.5	5.5/5.8	6.0/6.6	6.5/7.0
Power Factor cosΦ	1.0	1.0	1.0	1.0
DC output (V/A)	12/6	12/6	12/6	12/6
Engine model	LA186FA	LA188F	LA188F	LA192F
Starting system	Recoil/Electric	Recoil/Electric	Recoil/Electric	Recoil/Electric
Lube oil capacity (L)	1.65	1.65	1.65	1.65
Fuel tank capacity (L)	12.5	12.5	12.5	12.5
Fuel consumption (g/kW h)	≤400	≤370	≤370	≤340
Noise (7 meters away) dB (A)	≤82	≤82	≤82	≤86
Dimension (L×W×H) (mm)	LDG6000CL(E):740×475×590 LDG6000L(E):800×520×600 LDG6000K(E):750×485×605	LDG6500CL(E):740×475×590 LDG6500L(E):800×520×600 LDG6500K(E):750×485×605	LDG7500CL(E):740×475×590 LDG7500L(E):800×520×600 LDG7500K(E):750×485×605	LDG8000CL(E):740*475*600
Net weight (recoil) (kg)	LDG6000CL(E):83(95) LDG6000L(E):100(112) LDG6000K(E):91(103)	LDG6500CL(E):85(100) LDG6500L(E):95(110) LDG6500K(E):102(117)	LDG7500CL(E):90(105) LDG7500L(E):107(122) LDG7500K(E):100(115)	LDG8000CL(E):105(120)

LAUNTOP

SILENT DIESEL GENERATORS

Output : 4.2kW-6.6kW



SILENT DIESEL GENERATOR

- Air Cooled Engine
- IP 23 Protection
- Diesel Engine
- Noise Compliant

- Feature:**
- The lowest noise is 67 dB(A) at 7m.
 - Minimal vibration & smooth running.
 - Function better with double large muffler.
 - Fashion soundproof canopy.
 - Universal wheels make movement easily.
 - 8 hours' continuous running free of fuel plus.



SPECIFICATION

SILENT DIESEL GENERATOR		
Model	LDG6500S LDG6500S-KQ LDG6500SA	LDG7500S
Voltage (V)	110-240	110-240
Frequency (Hz)	50/60	50/60
Rate. AC output (kW)	5.0/5.3	5.5/6.0
Max. AC output (kW)	5.5/5.8	6.0/6.6
Power Factor cosΦ	1.0	1.0
DC output (V/A)	12/6	12/6
Engine model	LA188F	LA188F
Starting system	Electric	Electric
Displacement (cc)	474	474
Engine speed (rpm)	3000/3600	3000/3600
Lube oil capacity (L)	1.65	1.65
Fuel tank capacity (L)	16	25
Fuel consumption (g/kW h)	≤400	≤370
Noise (7 meters away) dB (A)	LDG6500S:≤71 LDG6500S-KQ:≤67 LDG6500SA:≤69	≤68
Dimension (L×W×H) (mm)	LDG6500S:900×520×700 LDG6500S-KQ:885×580×745 LDG6500SA:1060×535×740	960×560×730
Net weight (kg)	LDG6500S:154 LDG6500S-KQ:160 LDG6500SA:160	160

LAUNTOP

SILENT DIESEL GENERATORS

Output : 4.2kW-6.6kW



SILENT DIESEL GENERATOR

- Air Cooled Engine
- IP 23 Protection
- Diesel Engine
- Noise Compliant

Feature:

- The lowest noise is 67 dB(A) at 7m.
- Minimal vibration & smooth running.
- Function better with double large muffler.
- Fashion soundproof canopy.
- Universal wheels make movement easily.
- 8 hours' continuous running free of fuel plus.



SPECIFICATION

SILENT DIESEL GENERATOR		
Model	LDG5000S LDG5000S-KQ LDG5000SA	LDG6000S LDG6000S-KQ LDG6000SA
Voltage (V)	110-240	110-240
Frequency (Hz)	50/60	50/60
Rate. AC output (kW)	4.2/4.6	4.5/5.0
Max. AC output (kW)	4.6/5.0	5.0/5.5
Power Factor cosΦ	1.0	1.0
DC output (V/A)	12/6	12/6
Engine model	LA186F	LA186FA
Starting system	Electric	Electric
Displacement (cc)	406	418
Engine speed (rpm)	3000/3600	3000/3600
Lube oil capacity (L)	1.65	1.65
Fuel tank capacity (L)	16	16
Fuel consumption (g/kW h)	≤400	≤400
Noise (7 meters away) dB (A)	LDG5000S:≤71 LDG5000S-KQ:≤67 LDG5000SA:≤69	LDG6000S:≤71 LDG6000S-KQ:≤67 LDG6000SA:≤69
Dimension (L×W×H) (mm)	LDG5000S:900×520×700 LDG5000S-KQ:885×580×745 LDG5000SA:1060×535×740	LDG6000S:900×520×700 LDG6000S-KQ:885×580×745 LDG6000SA:1060×535×740
Net weight (kg)	LDG5000S:140 LDG5000S-KQ:145 LDG5000SA:145	LDG6000S:150 LDG6000S-KQ:155 LDG6000SA:155

LAUNTOP

TWIN-CYLINDER DIESEL GENERATOR

Output :10kW-13.75kW



TWIN-CYLINDER DIESEL GENERATOR

- Air Cooled Engine
- IP 23 Protection
- Diesel Engine
- Noise Compliant

- Feature:**
- Powered by 20hp twin-cylinder diesel engine.
 - Deluxe style with square frame.
 - Wheels contribute to easy moving.
 - Electric start with battery.



SPECIFICATION

TWIN-CYLINDER DIESEL GENERATOR				
Model	LDG12	LDG12-3	LDG12S	LDG12S-3
Voltage (V)	110-240	127/220、220/380 230/400、240/415	110-240	127/220、220/380 230/400、240/415
Frequency (Hz)	50/60	50/60	50/60	50/60
Rate. AC output (kW)	10/10kW	12.5/12.5kVA	10/10kW	12.5/12.5kVA
Max. AC output (kW)	11/11kW	13.75/13.75kVA	11/11kW	13.75/13.75kVA
Power Factor cosΦ	1.0	0.8	1.0	0.8
DC output (V/A)	12/6	12/6	12/6	12/6
Engine model	LA290	LA290	LA290	LA290
Starting system	Electric	Electric	Electric	Electric
Displacement (cc)	954	954	954	954
Engine speed (rpm)	3000/3600	3000/3600	3000/3600	3000/3600
Lube oil capacity (L)	3	3	3	3
Fuel tank capacity (L)	25	25	50	50
Fuel consumption (g/kW h)	≤350	≤350	≤350	≤350
Noise (7 meters away) dB (A)	≤82	≤82	≤69	≤69
Dimension (L×W×H) (mm)	910×578×800	910×578×800	1160×675×945	1160×675×945
Net weight (recoil) (kg)	190	190	295	295

LAUNTOP

DIESEL WATER PUMP

Max.capacity: 30-65 m³/hr



DIESEL WATER PUMP

-  Air Cooled Engine
-  IP 23 Protection
-  Diesel Engine
-  Noise Compliant

- Feature:**
- Rational construction.
 - Strong power and efficient.
 - Smooth and reliable operation.
 - Easy to disassemble and maintain.



SPECIFICATION

DIESEL WATER PUMP			
Model	LDP50C LDP50CL	LDP80C LDP80CL	LDP100C LDP100CL
Inlet(inch)	2	3	4
Outlet(inch)	2	3	4
Max.capacity(m³/hr)	30	50	65
Max.discharge head(m)	25	25	25
Max.suction head(m)	8	8	8
Engine model	LA170F	LA178F	LA186F
Fuel tank capacity (L)	LDP50C:2.5 LDP50CL:12.5	LDP80C:3.5 LDP80CL:12.5	LDP100C: 5.5 LDP100CL: 12.5
Dimension (LxWxH)(mm)	LDP50C:485x400x500 LDP50CL:475x455x615	LDP80C:540x440x540 LDP80CL:540x455x655	LDP100C: 645x475x605 LDP100CL: 645x475x725
Net weight(recoil) (kg)	LDP50C:38 LDP50CL:41	LDP80C:45 LDP80CL:49	LDP100C: 67 LDP100CL: 70

LAUNTOP

DIESEL HIGH PRESSURE PUMP

Max discharge head : 55 – 75m,
Max suction head: 8m



DIESEL HIGH PRESSURE PUMP



Feature:

- Thickening high quality aluminum alloy pump housing.
- Enclosed Impeller structure with high discharge head, large flow , max. lift 75M.
- Aluminum three-outlet with multi option, light portable.
- Widely use: high pressure water conveyance, fire fighting.
- Long distance water conveyance, hilly irrigation etc.



SPECIFICATION

DIESEL HIGH PRESSURE PUMP					
Model	LDF40C	LDF40C-2	LDF50C	LDF50C-2	LDF80C
Inlet(inch)	1.5	1.5	2	2	3
Outlet(inch)	1" *2, 1.5" *1	1" *2, 1.5" *1	2" *1, 1.5" *2	2" *1, 1.5" *2	3" *1
Max.capacity(m³/hr)	17	15	20	20	40
Max.discharge head(m)	55	75	55	75	60
Self-priming time(S/4m)	30	30	30	30	30
Max.suction head(m)	8	8	8	8	8
Engine model	LA178F	LA178F	LA178F	LA178F	LA186F
Fuel tank capacity (L)	3.5	3.5	3.5	3.5	5.5
Dimension (LxWxH)(mm)	540×440×540	540×440×540	540×440×540	540×440×540	645×475×605
Net weight(recoil) (kg)	45	47	45	47	62

LAUNTOP

DIESEL IRON PUMP

Max.capacity:19-26m³/hr



DIESEL IRON PUMP



- Feature:**
- Cast-iron pump with a closed cast-iron impeller.
 - Simple in structure,Reliable in performnce.
 - Max.discharge head :65M. Capacity max 25m³/hr at 40M.
 - Minimal vibration&smooth running.
 - CE approved.



SPECIFICATION

DIESEL IRON PUMP			
Model	LDP40C	LDP50DC	LDP80C
Inlet(inch)	1.5	2	3
Outlet(inch)	1.5	2	3
Max.capacity(m ³ /hr)	19	30	50
Max.discharge head(m)	55	65	65
Max.suction head(m)	8	8	8
Engine model	LA178F	LA186F	LA186F
Fuel tank capacity (L)	3.5	5.5	5.5
Dimension (L×W×H)(mm)	465×440×540	545×475×605	545×475×605
Net weight(recoil) (kg)	55	64	72.5

POWER YOU CAN TRUST

LAUNTOP GASOLINE PRODUCTS

LAUNTOP®



LAUNTOP

GASOLINE ENGINE

Output : 7hp-18hp



GASOLINE ENGINE

-  Air Cooled Engine
-  IP 23 Protection
-  Gasoline Engine
-  Noise Compliant

Feature:

- Easy starting, smooth running with minimal vibration.
- Oil alert built in.
- Compact and light-weight.
- Lower fuel consumption.
- Excellent durability and reliability.



SPECIFICATION

Model	LT210	LT225
Borexstroke(mm)	70×54	70×58
Displacement(cc)	208	223
Engine speed(rpm)	3000/3600	3000/3600
Rated output(hp)	5.0/5.5	5.5/6.0
Max.output(hp)	7	7.5
Lube oil capacity(L)	0.6	0.6
Fuel tank capacity(L)	3.6	3.6
Fuel consumption(g/kW.h)	≤374	≤374
Dimension(L×W×H)(mm)	315×362×335	315×362×335
Net weight(recoil) (kg)	16	16

SPECIFICATION

Model	LT270	LT420	LT460
Borexstroke(mm)	77×58	90×66	92×69
Displacement(cc)	270	420	458.5
Engine speed(rpm)	3000/3600	3000/3600	3000/3600
Rated output(hp)	6.2/7.2	9.8/11	11/12.3
Max.output(hp)	9	16	18
Lube oil capacity(L)	1.1	1.4	1.4
Fuel tank capacity(L)	6	6	6
Fuel consumption(g/kW.h)	374	370	370
Dimension(L×W×H)(mm)	380×430×410	405×450×435	405×450×435
Net weight(recoil) (kg)	33	27	33

LAUNTOP

GASOLINE TWIN-CYLINDER ENGINE

Output : 20hp



GASOLINE TWIN-CYLINDER ENGINE

-  Air Cooled Engine
-  IP 23 Protection
-  Gasoline Engine
-  Noise Compliant

Feature:

- V-Two cylinders engine.
- Easy starting, smooth running with minimal vibration.
- Oil alert built in.
- Lower fuel consumption.
- Excellent durability and reliability.




SPECIFICATION

Model	LT620
Bore×stroke(mm)	77×66
Displacement(cc)	614
Engine speed(rpm)	3000/3600
Rated AC output(hp)	15/17
Max. AC output(hp)	20
Lube oil capacity(L)	1.5
Fuel tank capacity(L)	/
Fuel consumption(g/kW.h)	370
Dimension(L×W×H)(mm)	390×460×455
Net weight(recoil) (kg)	43

LAUNTOP

GASOLINE GENERATOR

Output : 2.0kW-3.0kW

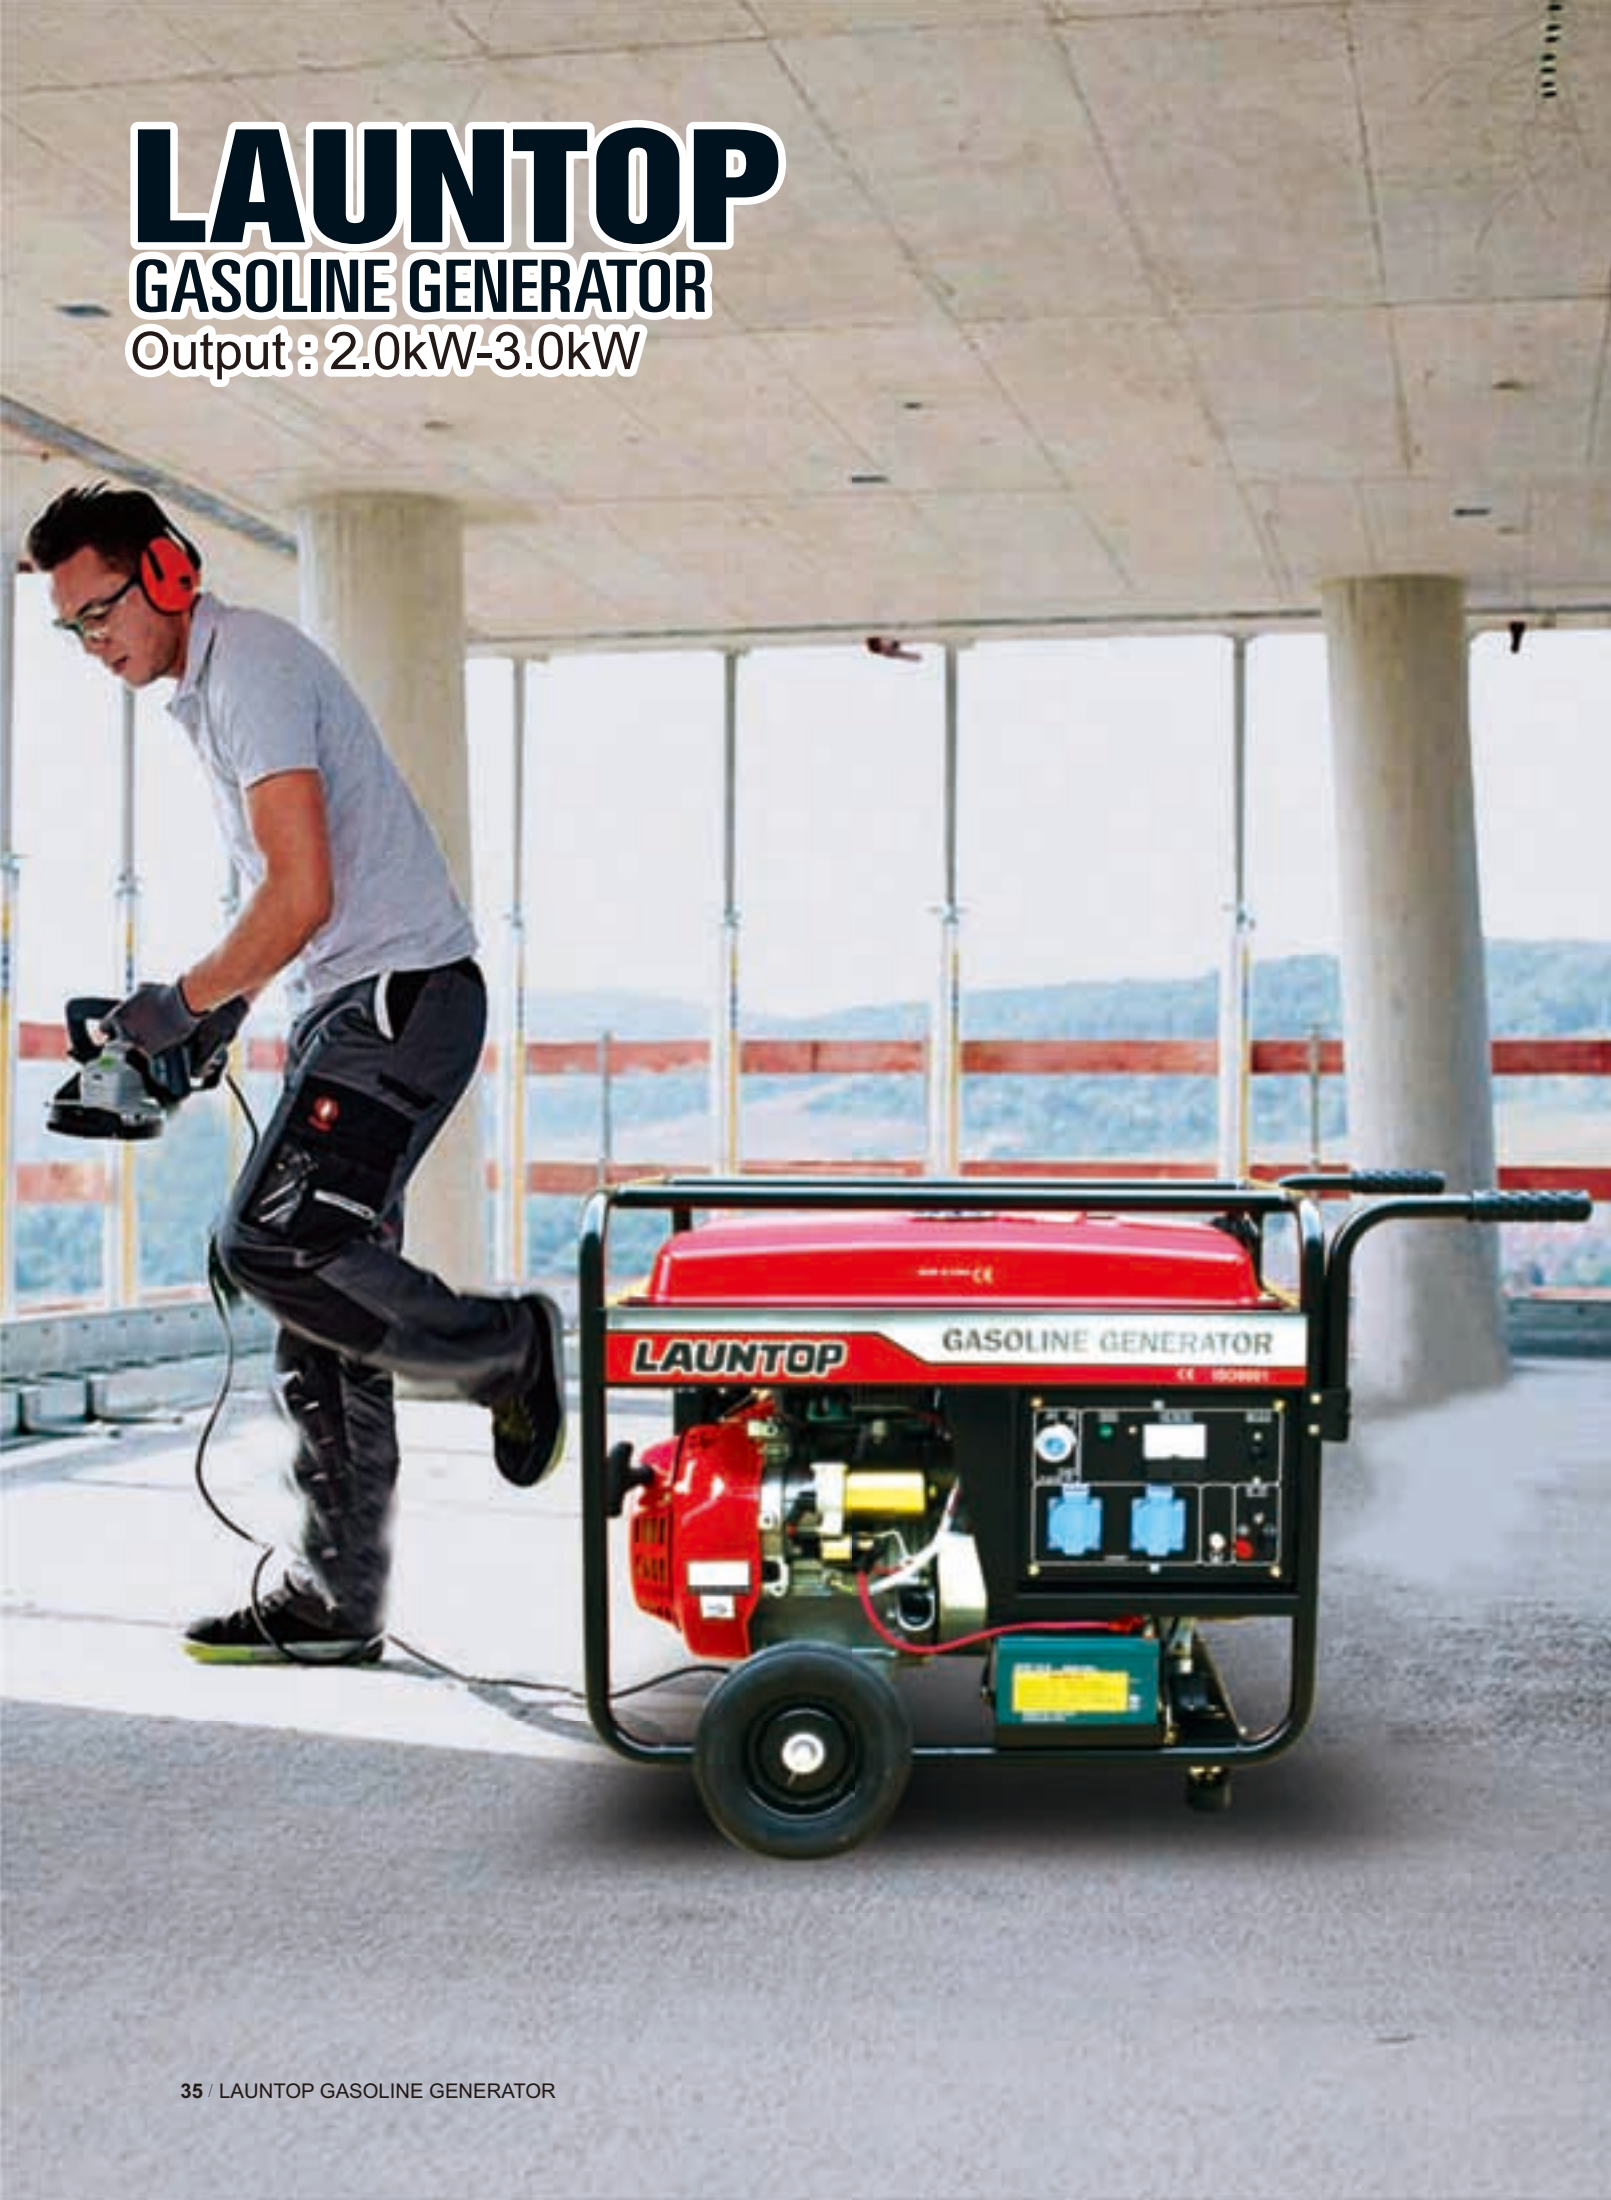

GASOLINE GENERATOR

- Air Cooled Engine
- IP 22 Protection
- Gasoline Engine
- Noise Compliant

- Feature:**
- Emergency low oil alert.
 - Circuit breaker protects overload operation.
 - Self-excited and voltage-constant with AVR.
 - Easy starting, smooth running with minimal vibration.
 - Low noise level & Low consumption.
 - Excellent durability and reliability.



SPECIFICATION

GASOLINE GENERATOR				
Model	LT2500CL(E) LT2500MX(E) LT2500N(E) LT2500L(E) LT2500LB(E)	LT3000CL(E) LT3000MX(E) LT3000N(E) LT3000L(E) LT3000LB(E)	LT3500CL(E) LT3500MX(E) LT3500N(E) LT3500L(E) LT3500LB(E)	LT3700CL(E) LT3700MX(E) LT3700N(E) LT3700L(E) LT3700LB(E)
Voltage (V)	110-240	110-240	110-240	110-240
Frequency (Hz)	50/60	50/60	50/60	50/60
Rate. AC output (kW)	2.0/2.3	2.3/2.5	2.5/2.8	2.8/3.0
Max. AC output (kW)	2.3/2.5	2.5/2.8	2.8/3.1	3.1/3.3
Power Factor cos Φ	1.0	1.0	1.0	1.0
DC output (V/A)	12/6	12/6	12/6	12/6
Engine model	LT210	LT210	LT210	LT225
Starting system	Recoil/Electric	Recoil/Electric	Recoil/Electric	Recoil/Electric
Displacement (cc)	208	208	208	223
Engine speed (rpm)	3000/3600	3000/3600	3000/3600	3000/3600
Lube oil capacity (L)	0.6	0.6	0.6	0.6
Fuel tank capacity (L)	15 LT2500LB:17L	15 LT3000LB:17L	15 LT3500LB: 17L	15 LT3700LB:17L
Continuous operating hour (h)	8.6 LT2500LB: 9.7	7.7 LT3000LB: 8.7	7.3 LT3500LB: 8.3	6.5 LT3700LB: 7.4
Fuel consumption (g/kW h)	≤630	≤610	≤590	≤590
Noise (7 meters away) dB (A)	≤67	≤68	≤68	≤69
Dimension (L×W×H) (mm)	590×433(448)×(430-483) LT2500L(E):680×450×460 LT2500LB(E):620×470×530	590×433(448)×(430-483) LT3000L(E):680×450×460 LT3000LB(E):620×470×530	590×433(448)×(430-483) LT3500L(E):680×450×460 LT3500LB(E):620×470×530	590×448(460)×(430-483) LT3700L(E):680×450×460 LT3700LB(E):620×470×530
Net weight (recoil) (kg)	34(38) LT2500LB(E): 38(42)	35(39) LT3000LB(E): 40(44)	39(43) LT3500LB(E):46(50)	44(48) LT3700LB(E): 48(52)

LAUNTOP

GASOLINE GENERATOR

Output: 3.0kW-6.0kW



GASOLINE GENERATOR

-  Air Cooled Engine
-  IP 22 Protection
-  Gasoline Engine
-  Noise Compliant

Feature:

- Emergency low oil alert.
- Circuit breaker protects overload operation.
- Self-excited and voltage-constant with AVR.
- Easy starting, smooth running with minimal vibration.
- Low noise level & Low consumption.
- Excellent durability and reliability.



SPECIFICATION

GASOLINE GENERATOR				
Model	LT3800CL(E) LT3800MX(E) LT3800N(E) LT3800L(E) LT3800LB(E)	LT4000CL(E) LT4000MX(E) LT4000N(E) LT4000L(E) LT4000LB(E)	LT5000CL(E) LT5000MX(E) LT5000N(E) LT5000L(E) LT5000LB(E)	LT6500CL(E) LT6500MX(E) LT6500N(E) LT6500L(E) LT6500LB(E)
Voltage (V)	110-240	110-240	110-240	110-240
Frequency (Hz)	50/60	50/60	50/60	50/60
Rate. AC output (kW)	3.2/3.5	3.2/3.5	4.0/4.5	5.0/5.5
Max. AC output (kW)	3.5/3.8	3.5/4.0	4.5/5.0	5.5/6.0
Power Factor cos Φ	1.0	1.0	1.0	1.0
DC output (V/A)	12/6	12/6	12/6	12/6
Engine model	LT225	LT270	LT420	LT420
Starting system	Recoil/Electric	Recoil/Electric	Recoil/Electric	Recoil/Electric
Displacement (cc)	223	270	420	420
Engine speed (rpm)	3000/3600	3000/3600	3000/3600	3000/3600
Lube oil capacity (L)	0.6	1.1	1.4	1.4
Fuel tank capacity (L)	15 LT3800LB:17L	25 LT4000LB:28L	25 LT5000LB:28L	25 LT6500LB:28L
Continuous operating hour (h)	6.2 LT3800LB:7	12.2 LT4000LB:12.2	7.8 LT5000LB:8.8	6.9 LT6500LB:7.7
Fuel consumption (g/kW h)	≤580	≤550	≤580	≤520
Noise (7 meters away) dB (A)	≤69	≤72	≤75	≤75
Dimension (L×W×H) (mm)	590×448(460)×(430-483) LT3800L(E):680×450×460 LT3800LB(E):620×470×530	685×512×550 LT4000L(E):800×515×550 LT4000LB(E):720×530×610	685×512×550 LT5000L(E):800×515×550 LT5000LB(E):720×530×610	685×512×550 LT6500L(E):800×515×550 LT6500LB(E):720×530×610
Net weight (recoil) (kg)	46(50) LT3800LB(E):50(54)	51(57) LT4000LB(E):54(60)	62(68) LT5000LB(E):65(71)	67(73) LT6500LB(E):70(76)

LAUNTOP

GASOLINE GENERATOR

Output: 6.0kW-8.0kW



GASOLINE GENERATOR

- Air Cooled Engine
- IP 22 Protection
- Gasoline Engine
- Noise Compliant

Feature:

- Circuit breaker protects overload operation.
- Self-excited and voltage-constant with AVR.
- Easy starting, smooth running with minimal vibration.
- Low noise level & Low consumption.
- Excellent durability and reliability.



SPECIFICATION

GASOLINE GENERATOR			
Model	LT7500CL(E) LT7500MX(E) LT7500N(E) LT7500L(E) LT7500LB(E)	LT9000CL(E) LT9000MX(E) LT9000N(E) LT9000L(E) LT9000LB(E)	LT10000LB(E)
Voltage (V)	110-240	110-240	110-240
Frequency (Hz)	50/60	50/60	50/60
Rate. AC output (kW)	6.0/6.5	6.5/7.0	7.0/7.5
Max. AC output (kW)	6.5/7.0	7.1/7.7	7.5/8.0
Power Factor cos Φ	1.0	1.0	1.0
DC output (V/A)	12/6	12/6	12/6
Engine model	LT420	LT460	LT460
Starting system	Recoil/Electric	Recoil/Electric	Recoil/Electric
Displacement (cc)	420	458.5	458.5
Engine speed (rpm)	3000/3600	3000/3600	3000/3600
Lube oil capacity (L)	1.4	1.4	1.4
Fuel tank capacity (L)	25 LT7500LB:28L	25 LT9000LB:28L	25 LT10000LB:28L
Continuous operating hour (h)	6.5 LT7500LB:7.3	5.5 LT9000LB:6.2	4.8 LT10000LB:5.4
Fuel consumption (g/kW h)	≤460	≤500	≤480
Noise (7 meters away) dB (A)	≤76	≤78	≤80
Dimension (L×W×H) (mm)	685×512×550 LT7500L(E):800×515×550 LT7500LB(E):720×530×610	685×512×550 LT9000L(E):800×515×550 LT9000LB(E):720×530×610	685×512×550 LT10000LB(E):720×530×610
Net weight (recoil) (kg)	71(77) LT7500LB(E):74(78)	75(82) LT9000LB(E):78(85)	80(87)

LAUNTOP

SILENT GASOLINE GENERATOR

Output: 4.5kW-8.8kW



SILENT GASOLINE GENERATOR

- Air Cooled Engine
- IP 22 Protection
- Gasoline Engine
- Noise Compliant

- Feature:**
- Emergency low oil alert.
 - Circuit breaker protects overload operation.
 - Self-excited and voltage-constant with AVR.
 - Easy starting, smooth running with minimal vibration.
 - Low noise level & Low consumption.
 - Excellent durability and reliability.




SPECIFICATION

SILENT GASOLINE GENERATOR			
Model	LT6500S	LT7500S	LT10000S
Voltage (V)	110-240	110-240	110-240
Frequency (Hz)	50/60	50/60	50/60
Rate. AC output (kW)	4.5/5.0	5.5/6.0	7.5/8.0
Max. AC output (kW)	5.0/5.5	6.0/6.6	8.0/8.8
Power Factor cos Φ	1.0	1.0	1.0
DC output (V/A)	12/6	12/6	12/6
Engine model	LT420	LT420	LT460
Starting system	Recoil/ Electric	Recoil/ Electric	Electric
Displacement (cc)	420	420	458.5
Engine speed (rpm)	3000/3600	3000/3600	3000/3600
Lube oil capacity (L)	1.4	1.4	1.4
Fuel tank capacity (L)	15	15	25
Fuel consumption (g/kW h)	≤550	≤490	≤480
Noise (7 meters away) dB (A)	≤69	≤69	≤65
Dimension (L×W×H) (mm)	1000×520×740	1000×520×740	960×560×730
Net weight (recoil) (kg)	123	126	140

LAUNTOP

TWIN-CYLINDER GASOLINE GENERATOR

Output : 8.5kW-13kW

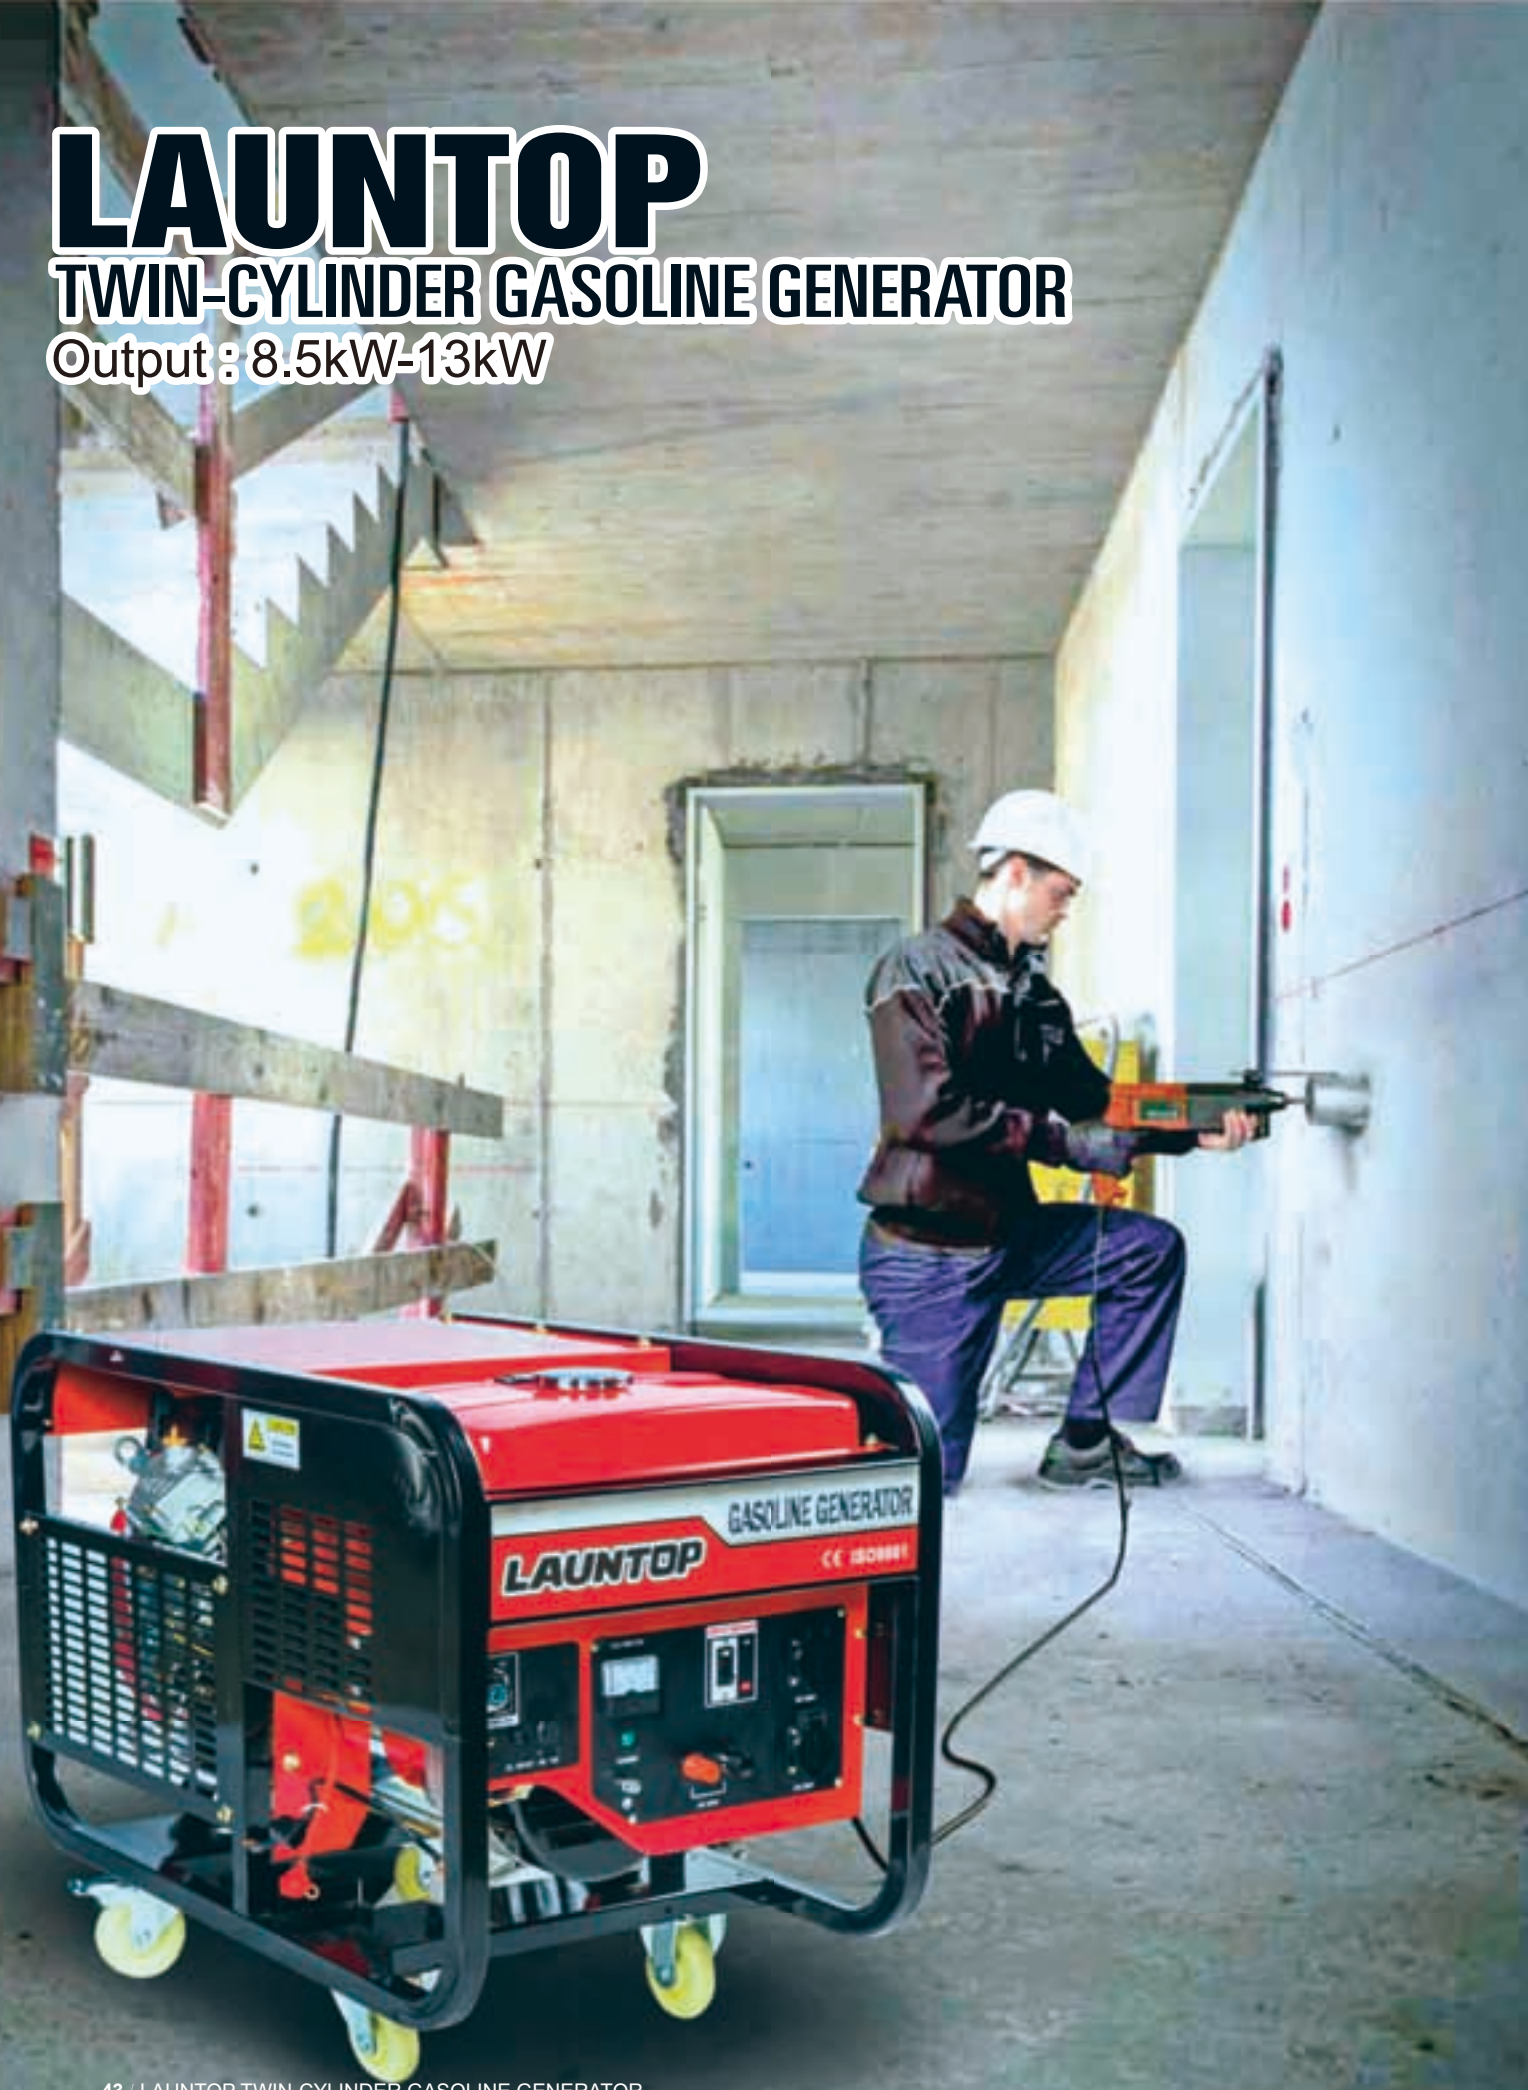

TWIN-CYLINDER GASOLINE GENERATOR

-  Air Cooled Engine
-  IP 22 Protection
-  Gasoline Engine
-  Noise Compliant

- Feature:**
- Emergency low oil alert.
 - Circuit breaker protects overload operation.
 - Self-excited and voltage-constant with AVR.
 - Easy starting, smooth running with minimal vibration.
 - Low noise level & Low consumption.
 - Excellent durability and reliability.




SPECIFICATION

TWIN-CYLINDER GASOLINE GENERATOR						
Model	LT11000ME	LT13000ME	LT15000ME	LT11000S	LT13000S	LT15000S
Voltage (V)	110-240	110-240	110-240	110-240	110-240	110-240
Frequency (Hz)	50/60	50/60	50/60	50/60	50/60	50/60
Rate. AC output (kW)	8.5/9.5	10.0/10.5	11/12	8.5/9.5	10.0/10.5	11/12
Max. AC output (kW)	9.5/10.5	10.5/11.0	12/13	9.5/10.5	10.5/11.0	12/13
Power Factor cos Φ	1.0	1.0	1.0	1.0	1.0	1.0
DC output (V/A)	12/6	12/6	12/6	12/6	12/6	12/6
Engine model	LT620	R670	DHT720E	LT620	R670	DHT720E
Starting system	Electric	Electric	Electric	Electric	Electric	Electric
Displacement (cc)	614	670	713	614	670	713
Engine speed (rpm)	3000/3600	3000/3600	3000/3600	3000/3600	3000/3600	3000/3600
Lube oil capacity (L)	1.5	1.5	1.5	1.5	1.5	1.5
Fuel tank capacity (L)	25	25	25	25	25	25
Fuel consumption (g/kW h)	≤510	≤480	≤450	≤510	≤480	≤450
Noise (7 meters away) dB (A)	≤77	≤77	≤77	≤66	≤66	≤66
Dimension (L×W×H) (mm)	930×555×580	930×555×580	930 x 555 x 580	990×650×945	990×650×945	990 x 650 x 945
Net weight (recoil) (kg)	140	140	144	218	218	234

LAUNTOP

LIQUIFIED PETROLEUM GAS & LPT GENERATOR

Output : 2.0kW-6.0kW

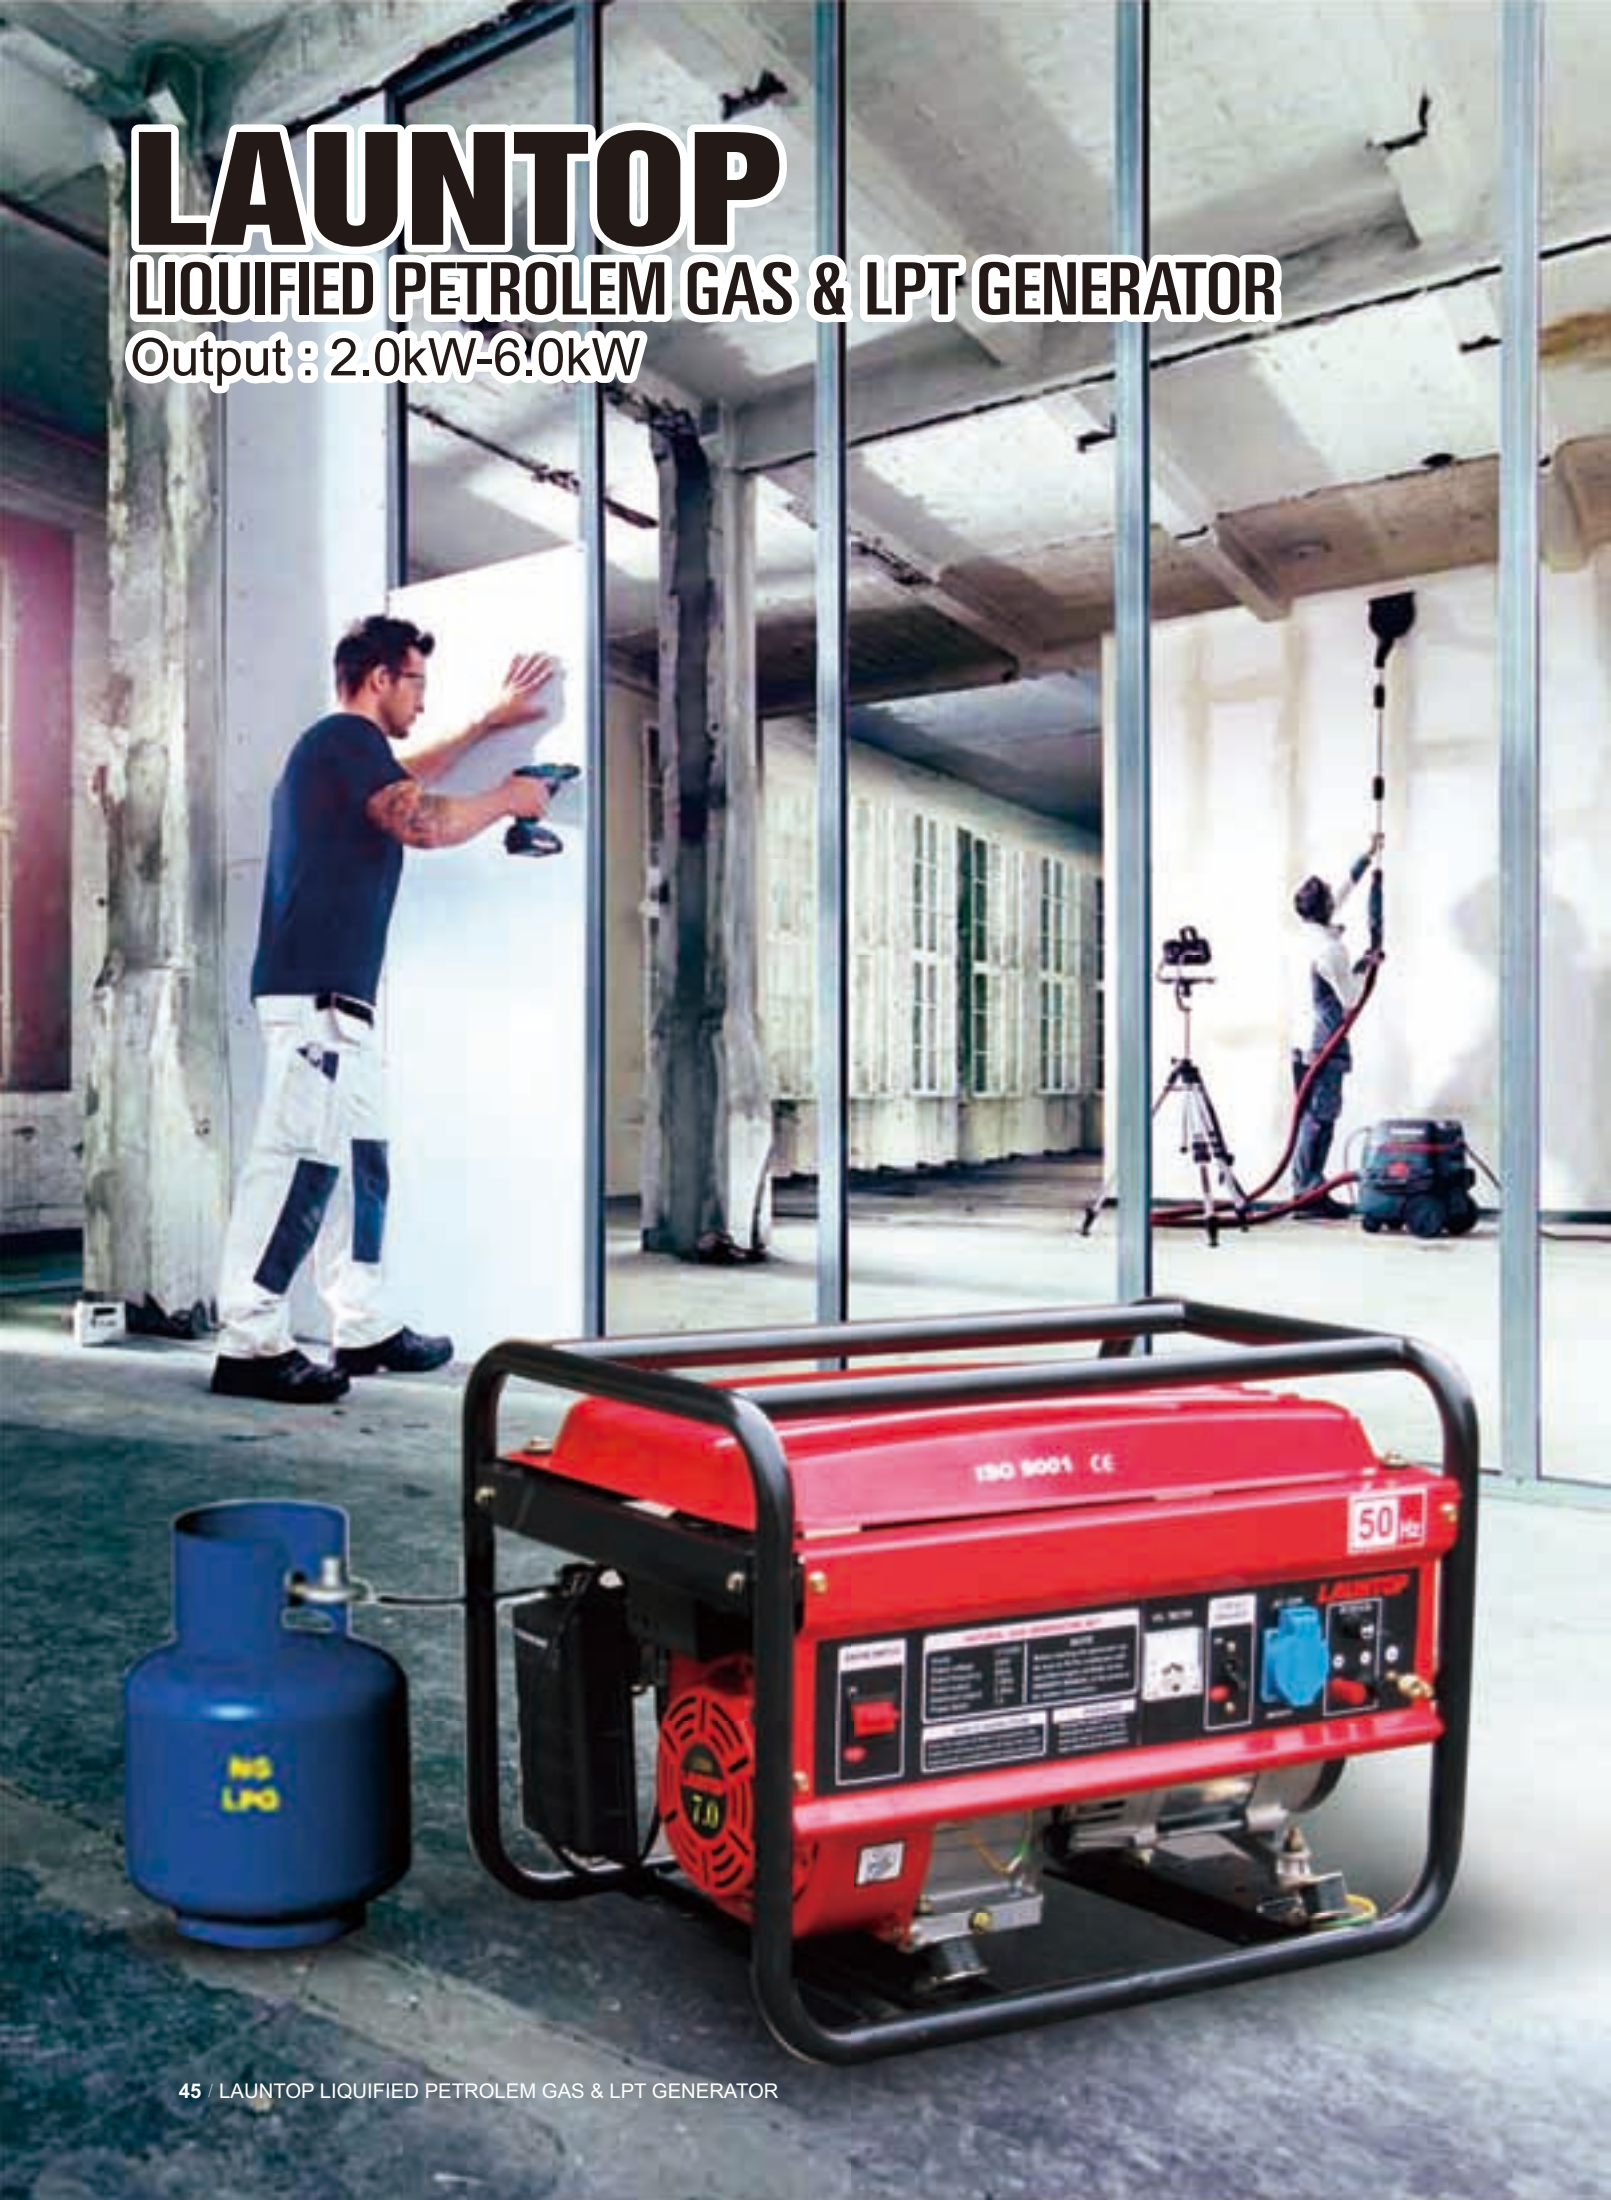

LIQUIFIED PETROLEUM GAS & LPT GENERATOR

- Air Cooled Engine
- IP 22 Protection
- Gasoline Engine
- Noise Compliant

- Feature:**
- Dual Purpose generator with LPG & Petrol engine.
 - Circuit breaker protects overload operation.
 - Self-excited and voltage-constant with AVR.
 - Easy starting, smooth running with minimal vibration.
 - Low noise level & Low consumption.
 - Excellent durability and reliability.



SPECIFICATION

LIQUIFIED PETROLEUM GAS & LPT GENERATOR				
Model	LPG2500CL(E)	LPG6500CL(E)	LPT2500CL(E)	LPT6500CL(E)
Voltage (V)	110-240	110-240	110-240	110-240
Frequency (Hz)	50/60	50/60	50/60	50/60
Rate. AC output (kW)	2.0/2.3	5.0/5.5	2.0/2.3	5.0/5.5
Max. AC output (kW)	2.3/2.5	5.5/6.0	2.3/2.5	5.5/6.0
Power Factor cos Φ	1.0	1.0	1.0	1.0
DC output (V/A)	12/6	12/6	12/6	12/6
Fuel	LPG	LPG	LPG or Gasoline	LPG or Gasoline
Engine model	LPG210	LPG420	LPT210	LPT420
Starting system	Recoil/Electric	Recoil/Electric	Recoil/Electric	Recoil/Electric
Displacement (cc)	208	420	208	420
Engine speed (rpm)	3000/3600	3000/3600	3000/3600	3000/3600
Lube oil capacity (L)	0.6	1.4	0.6	1.4
Fuel tank capacity (L)	15	25	15	25
Fuel consumption (g/kW h)	≤630	≤520	≤630	≤520
Noise (7 meters away) dB (A)	≤67	≤75	≤67	≤75
Dimension (LxWxH) (mm)	590X433X483	685X512X550	590X433X483	685X512X550
Net weight (recoil) (kg)	34(38)	67(73)	34(38)	67(73)


LAUNTOP

PORTABLE GASOLINE GENERATOR

Output : 0.65kW-1.1kW



PORTABLE GASOLINE GENERATOR



- Feature:**
- Portable and light weight perfect for BBQ, Camping.
 - Low noise level & Low consumption.
 - Easy operation and maintaince.
 - Excellent durability and reliability.



SPECIFICATION

PORTABLE GASOLINE GENERATOR			
Model	LT950	LT1200	LT1200CL
Voltage (V)	110-240	110-240	110-240
Frequency (Hz)	50/60	50/60	50/60
Rate. AC output (kW)	0.65/0.72	0.9/1.0	0.9/1.0
Max. AC output (kW)	0.72/0.8	1.0/1.1	1.0/1.1
Power Factor cos Φ	1.0	1.0	1.0
DC output (V/A)	12/4	12/6	12/6
Engine model	LT1E45	LT154F	LT154F
Starting system	Recoil	Recoil	Recoil
Displacement (cc)	63	87	87
Engine speed (rpm)	3000/3600	3000/3600	3000/3600
Lube oil capacity (L)	/	0.4	0.4
Fuel tank capacity (L)	4.2	5	5
Fuel consumption (g/kW h)	≤900	≤920	≤920
Noise (7 meters away) dB (A)	≤65	≤65	≤65
Dimension (L×W×H) (mm)	370×315×310	465×375×380	480×375×380
Net weight (recoil) (kg)	19	23	27

LAUNTOP

GASOLINE WATER PUMP

Max.capacity: 18-65m³/hr



GASOLINE WATER PUMP



Feature:

- Offer the most reliable water removal.
- Powerful OHV design for quick and easy priming.
- Full frame type light and compact design make more sturdy and durable.
- Durable mechanical seals & cast iron volute & impeller keep running longer and more efficiently.



SPECIFICATION

Gasoline Water Pump				
Model	LTP40C	LTP50C	LTP80C	LTP100C
Inlet(inch)	1.5	2	3	4
Outlet(inch)	1.5	2	3	4
Max.capacity(m³/hr)	18	30	50	65
Max.discharge head(m)	22	25	25	25
Self-priming time(S/4m)	80	70	120	180
Max.suction head(m)	8	8	8	8
Engine model	LT154F	LT210F	LT210F	LT270F
Fuel tank capacity (L)	2	3.6	3.6	6
Dimension (L×W×H)(mm)	435×330×315	450×375×375	510×375×435	610×480×575
Net weight(recoil) (kg)	17	24	25	41.7

LAUNTOP

GASOLINE HIGH PRESSURE PUMP

Max.capacity: 15-40 m³/hr

GASOLINE HIGH PRESSURE PUMP



- Feature:**
- Offer the most reliable water removal.
 - Powerful OHV design for quick and easy priming.
 - Full frame type light and compact design make more sturdy and durable.
 - Durable mechanical seals & cast iron volute & impeller keep running longer and more efficiently.



SPECIFICATION

Gasoline High Pressure Pump					
Model	LTF40C	LTF40C-2	LTF50C	LTF50C-2	LTF80C
Inlet(inch)	1.5	1.5	2	2	3
Outlet(inch)	1" *2, 1.5" *1	1" *2, 1.5" *1	2" *1, 1.5" *2	2" *1, 1.5" *2	3" *1
Max.capacity(m³/hr)	17	15	20	20	40
Max.discharge head(m)	55	75	55	75	65
Self-priming time(S/4m)	30	30	30	30	30
Max.suction head(m)	8	8	8	8	8
Engine model	LT210F	LT210F	LT210F	LT210F	LT420F
Fuel tank capacity (L)	3.6	3.6	3.6	3.6	6
Dimension (LxWxH)(mm)	490×400×422	490×400×422	490×400×422	490×400×422	610×520×535
Net weight(recoil) (kg)	26	29	27	28	44

LAUNTOP

GASOLINE IRON PUMP

Max.capacity: 19-50m³/hr



GASOLINE IRON PUMP



- Feature:**
- Offer the most reliable water removal.
 - Powerful OHV design for quick and easy priming.
 - Full frame type light and compact design make more sturdy and durable.
 - Durable mechanical seals & cast iron volute & impeller keep running longer and more efficiently.



SPECIFICATION

Gasoline Iron Pump			
Model	LTTP40C	LTTP50DC	LTTP80C
Inlet(inch)	1.5	2	3
Outlet(inch)	1.5	2	3
Max.capacity(m³/hr)	19	25	50
Max.discharge head(m)	55	55	65
Max.suction head(m)	8	8	8
Engine model	LT210F	LT270F	LT420F
Fuel tank capacity (L)	3.6	6	6
Dimension (L×W×H)(mm)	420X385X375	485×480×505	535×480×540
Net weight(recoil) (kg)	35	41.6	55

LAUNTOP

DIESEL & GASOLINE TRASH PUMP

Max.capacity: 50-160m³/hr

DIESEL & GASOLINE TRASH PUMP



Air Cooled
Engine

Noise
Compliant

Feature:

- Offer the most reliable water removal.
- Powerful OHV design for quick and easy priming.
- Full frame type light and compact design make more sturdy and durable.
- Durable mechanical seals & cast iron volute & impeller keep running longer and more efficiently.



SPECIFICATION

Diesel & Gasoline Trash Pump				
Model	LDWT80C	LDWT150CL	LTWT80C	LTWT80DC
Inlet(inch)	3	6	3	3
Outlet(inch)	3	6	3	3
Max.capacity(m³/hr)	50	160/130	50	50
Max.discharge head(m)	25	18	25	25
Max.suction head(m)	8	6	8	8
Engine model	LA178F	LA290F	LT210F	LT270F
Fuel tank capacity (L)	3.5	30	3.6	6
Dimension (L×W×H)(mm)	590×450×530	1000×660×880	545×435×450	599×480×490
Net weight(recoil) (kg)	48	150	35	45

LAUNTOP

INVERTER GENERATOR

Output: 2kW-4kW



INVERTER GENERATOR



Air Cooled
Engine



IP 23
Protection



Gasoline
Engine



Noise
Compliant

Feature:

- Low oil level protection
- Overload power indication, reliable safety
- Light weight, small size
- Low noise
- Low wave distortion rate and steady frequency
- Low fuel consumption



SPECIFICATION

Model	LT2000IS	LT4000IS
Voltage(V)	110-240	110-240
Frequency(Hz)	50/60	50/60
Rate. AC output(KW)	1.8	3.6
Max.AC output(KW)	2	4
DC output	12V/8.0A	12V/8.0A
Fuel tank capacity	4L	10L
Full load continual running time	4H	6H
1/2 load continual running time	6H	12H
Noise (7m)	63dB	69dB
Engine model	R80i	GK225
Engine type	air-cooldded,4-stroke, OHV, single cylinder	air-cooldded,4-stroke, OHV, single cylinder
Starting System	Recoil start	Recoil start
Displacement(cc)	79.7	223
Bore X Sroke	48.6*43	70*59
Compression Ratio	8.7:1	8.7:1
Dimension (L X W X H)	498×298×459	605×432×500
Net Weight	22kg	40kg

POWER YOU CAN TRUST

LAUNTOP WELDING GENERATOR

LAUNTOP®



LAUNTOP

DIESEL WELDING GENERATOR

Output : 4.5-5.0kW

DIESEL WELDING GENERATOR

-  Air Cooled Engine
-  IP 23 Protection
-  Diesel Engine
-  Noise Compliant

- Feature:**
- Inductor install to make sure the stable performance.
 - Support welding rod from 2.0mm-6.0mm.
 - 60% duty cycle.
 - AVR alternator provides stable voltage and current.
 - Circuit breaker protects overload operation.



SPECIFICATION

WELDING GENERATOR					
Model	LDW180A(E)	LDW180AR(E)	LDW180ARK(E)	LDW180ARN(E)	LDW200ARN(E)
Alternator type		Brush, 2-pole, Welding			
Voltage (V)		110-240			
Frequency (Hz)		50/60			
Rate. AC Output (kW)		4.5/5.0			
Max. AC Output (kW)		5.0/5.5			
Power factor		1.0			
DC Output (V/A)		12/6			
Fuel consumption (kW-h)		≤400			≤370
Noise level at 7meters, dB(A)		≤82			
Welder	No load Voltage (V)	62~68			
	Operating welding voltage (V)	22~26			
	Operation Current (A)	50~130			50~150
	Max. Arcing Current (A)	180			200
	Duty Cycle (a)	60%			
Engine Model			LA186FA		LA188F
Engine Type		Single-cylinder, Vertical, 4-stroke, air-cooled, direction injection			
Displacement (cc)		418			474
Engine Speed (rpm)		3000/3600			
Starting Method		Recoil/Electric			
Lube Oil Capacity (L)		1.65			
Fuel Capacity (L)		12.5			
Dimension (L*W*H) mm		740*475*590	740*475*605	750*485*630	800*525*600
Net Weight (kg)		106(118)	113 (125)	121(133)	118 (130) 123 (135)

LAUNTOP

DIESEL WELDING GENERATOR

Output : 3.5kW-11kW



DIESEL WELDING GENERATOR



- Feature:**
- Inductor install to make sure the stable performance.
 - Support welding rod from 2.0mm-6.0mm.
 - 60% duty cycle.
 - AVR alternator provides stable voltage and current.
 - Circuit breaker protects overload operation.



SPECIFICATION

WELDING GENERATOR						
Model	LDG12-300A		LDW300ARE	LDW180AS	LDW180ARS	LDW200AR(E)
Alternator type			Brush, 2-pole, Welding			
Voltage (V)			110-240			
Frequency (Hz)			50/60			
Rate. AC Output (kW)		10/10	3.0/3.3	4.5/5.0	4.5/5.0	4.5/5.0
Max. AC Output (kW)		11/11	3.3/3.6	5.0/5.5	5.0/5.5	5.0/5.5
Power factor			1.0			
DC Output (V/A)			12/6			
Fuel consumption (kW-h)		≤350	≤350	≤400	≤400	≤370
Noise level at 7meters, dB(A)		≤82		≤71		≤82
Welder	No load Voltage (V)	62~68	75~80	62~68	62~68	62~68
	Operating welding voltage (V)	22~32		22~26		22~26
	Operation Current (A)	50~250		50~130		50~150
	Max. Arcing Current (A)	300		180		200
	Duty Cycle (a)	60%				
Engine Model		LA290F		LA186FA		LA188F
Engine Type		Twin-cylinder, Vertical, 4-stroke, air-cooled		Single-cylinder, Vertical, 4-stroke, air-cooled		
Displacement (cc)			954	418		474
Engine Speed (rpm)			3000/3600			
Starting Method		Electric				Recoil/Electric
Lube Oil Capacity (L)		3		1.65		1.65
Fuel Capacity (L)		25		16		12.5
Dimension (L*W*H) mm		910*578*668	1070*578*668	900*520*700		750*485*630
Net Weight (kg)		195		158	165	121(133)

LAUNTOP

GASOLINE WELDING GENERATOR

Output: 5.5-13kW

GASOLINE WELDING GENERATOR

-  Air Cooled Engine
-  IP 23 Protection
-  Diesel Engine
-  Noise Compliant

Feature:

- Inductor install to make sure the stable performance.
- Support welding rod from 2.0mm-6.0mm.
- 60% duty cycle.
- AVR alternator provides stable voltage and current.
- Circuit breaker protects overload operation.



SPECIFICATION

GASOLINE WELDING GENERATOR				
Model	LTW200A(E)	LTW200AR(E)	LTW200ARLB(E)	LT11000ME-300A
Alternator type	Brush, 2-pole, Welding			
Voltage (V)	110-240			
Frequency (Hz)	50/60			
Rate. AC Output (kW)	4.5/5.0		8.5/9.5	11/12
Max. AC Output (kW)	5.0/5.5		9.5/10.5	12/13
Power factor	1.0			
DC Output (V/A)	12/6			
Fuel consumption (kW-h)	≤490		≤510	≤450
Noise level at 7meters, dB(A)	≤76		≤77	
Welder	No load Voltage (V)	62~68		70~85
	Operating welding voltage (V)	22~26		22~30
	Operation Current (A)	50~140		50~230
	Max. Arcing Current (A)	200		300
	Duty Cycle (a)	60%		
Engine Model	LA420F		LA620F	DHT720E
Engine Type	Single-cylinder, Vertical, 4-stroke, air-cooled, direction injection		Twin-cylinder, V type, 4-Stroke, Air-cooled OHV	
Displacement (cc)	420		614	713
Engine Speed (rpm)	3000/3600			
Starting Method	Recoil/Electric		Electric	
Lube Oil Capacity (L)	1.4		1.5	
Fuel Capacity (L)	25		28	25
Dimension (L*W*H) mm	685*520*565	685*520*625	720*530*680	930*555*580
Net Weight (kg)	94 (100)	101 (107)	94 (100)	145

POWER YOU CAN TRUST

LAUNTOP DIESEL & GASOLINE TILLER

LAUNTOP®



TILLERS



GASOLINE TILLER

Technical Data

Model	Gk1050	Gk1050	Gk1000	Gk900	Gk750
Dimensions(mm)	1600*1050*1100	1600*1050*1100	1500*800*1100	1500*750*1100	1550*650*1050
Tilling Width(mm)	800-1050	800-1350	750-1000	600-950	600-750
Tilling Depth(mm)	150-300	150-300	150-300	150-300	150-300
Shifting Gears	1, 0 (-1) , 2	1, 0 (-1) , 2	1, 0 (-1) , 2	-1,0,2,1	-1,0,2,1
Transsmission Mode	Gear	Gear	Gear	Belt	Belt
Engine Model	Gasoline GK270	Gasoline GK390	Gasoline GK210	Gasoline GK210	Gasoline GK210
Displacement(cc)	270	389	212	212	212
Max Output(hp.kw/rpm)	9(5.8)/3600	11(7.8)/3600	7(4.4)/3600	7(4.4)/3600	7(4.4)/3600
Starting System	Recoil/ Electric Start	Recoil/ Electric Start	Recoil Start	Recoil Start	Recoil Start
Transporting Wheels	4.0-8 /5.0-12	4.0-8 /5.0-12	4.00-8	4.0-8	3.50-6
Tilling Blades	3+1 group 32pcs	3+1 group 32pcs	3+1 group 32pcs	3+1 group 24pcs	2+1 group 24pcs
Packing Dimensions(mm)	1050*570*780	1050*570*780	840*465*780	820*465*780	820*385*780
N.W/G.W(kg)	115 / 125	122/ 132	75 / 85	89 / 98	63 / 71
Cont. Load (20 gp)	65	65	96	105	126
Cont. Load (40 hc)	132	132	210	210	258

DIESEL TILLER

Technical Data

Model	GK1050D	Gk1350	GK1000D
Dimensions(mm)	1600*1050*1100	1600*1050*1100	1500*800*1100
Tilling Width(mm)	800-1050	800-1350	750-1000
Tilling Depth(mm)	150-300	150-300	150-300
Shifting Gears	1, 0 (-1) , 2	1, 0 (-1) , 2	1, 0 (-1) , 2
Transsmission Mode	Gear	Gear	Gear
Engine Model	Diesel GK178	Diesel GK186FA	Diesel GK173
Displacement(cc)	296	418	247
Max Output(hp.kw/rpm)	6(4.3)/3600	10(6.3)/3600	5(3.7)/3600
Starting System	Recoil/ Electric Start	Recoil/ Electric Start	Recoil Start
Transporting Wheels	4.0-8 /5.0-12	4.0-8 /5.0-12	4.00-8
Tilling Blades	3+1 group 32pcs	3+1+1 group 40pcs	3+1 group32pcs
Packing Dimensions(mm)	1050*570*780	1050*570*780	840*465*780
N.W/G.W(kg)	120 / 130	135 / 145	88 / 98
Cont. Load (20 gp)	65	65	96
Cont. Load (40 hc)	132	132	210

